



County Hospital/Newport, South Wales

Client: NHS Wales


Contractor: MITIE Facilities Management



DEMAND

A busy community hospital providing inpatient and outpatient facilities, including day hospital, clinics, cardiac rehabilitation service and other medical facilities. Mite Facilities Management were tasked with upgrading and replacing existing hot water generation units on site. 2 off Propak Thermal units were

selected due to their robust construction, small physical footprint, MODBUS control, and WRAS approved components. The ability to delivery on time and with short lead times was of paramount importance as the scheduled shut down needed to be minimised as the hospital would still be functioning.

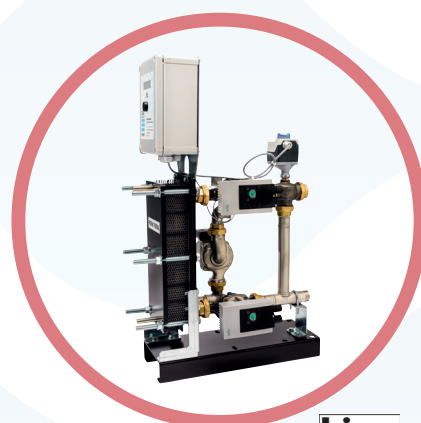

SOLUTION

2x ProPak Thermal 3017

2x Instantaneous Packaged Plate Heat Exchangers complete with, Stainless Steel Plates, EPDM Gaskets, Siemens 3-port control valve, 2x Wilo Primary Pumps providing 3,420 litres of hot water per hour.

