

ProPak Thermal 55-Series DS Semi Instantaneous Packaged Plate Heat Exchanger

Product Description

WRAS and KIWA UK Reg 4 Approved Packaged Plate Heat Exchanger suitable for Domestic HotWater Generation.

The ProPak Thermal range of packaged plate heat exchangers are suitable for the generation of domestic hot water in commercial and industrial applications. Each WRAS and KIWA UK Reg 4 approved unit is constructed with Stainless Steel AISI 316 plate heat exchangers, has a MODBUS interface and fully modulating ERP A rated primary pumps.

ProPak ® Thermal Range: Features

- Full WRAS Approval (WRAS Approval Number 2312347)
- Heat outputs: 75 – 800kw
- Stainless Steel AISI 316 Plates
- EPDM Gaskets
- ERP A rated fully modulating Primary Pumps
- PID Controller with MODBUS Interface
- Fast acting Siemens 3-port valve
- High Density, Semi-Rigid Insulation

ProPak ® Thermal Range: Options


- Skid Mounting with pre-connected Buffer Vessel
- High Outputs: 1mw + options



Technical Specification

| | |
|--|---|
| Plate Construction Material | AISI 316L Stainless Steel |
| Gasket Construction Material | EPDM - PRX Gasket |
| Press Plate and Mounting Frame Construction Material | Epoxy Coated Quality Mild Steel |
| Ancillaries Mounting Pipework | AISI 316L Stainless Steel |
| Insulating Jacket Material | 30mm High Density Semi - Rigid Polyolefin Foam (PO) |
| Full PID Control Unit | MODBUS RTU/RS 485 BMS Interface |
| Maximum Full Load Current | 8 Amp |
| Primary Circuit Motorised 3 Port Control Valve | Siemens VXF32.50-40 / SAS 619.03 Actuator |
| Primary Circulation Pump(s) | Yonos Para Hi - Flow 50 / 12 |
| Secondary Circuit Shunt Pump | Grundfos TP 50 - 60 |
| Total Height | 1700 mm |
| Total Length | 1050 mm |
| Total Width | 800 mm |
| Weight | 250 kg |
| Maximum Operating Pressure - Primary | 10 bar |
| Maximum Operating Pressure - Secondary | 10 bar |
| WRAS Approval Number | 2312347 |

ProPak Thermal 55-Series DS Semi Instantaneous Packaged Plate Heat Exchanger

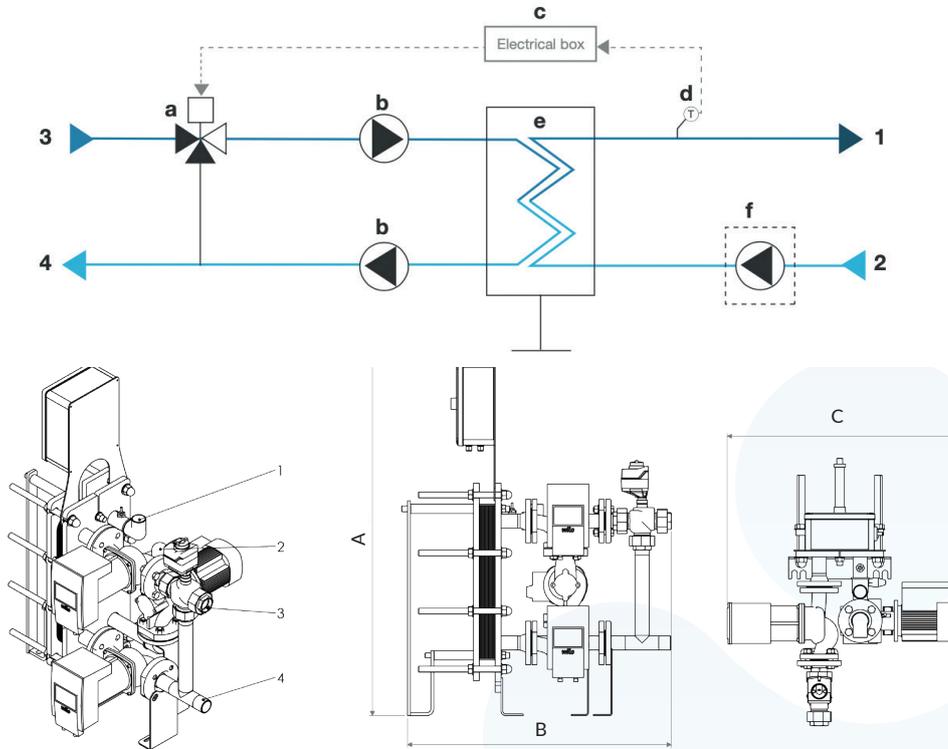

Dimensions (mm)

| | |
|---|------|
| A | 1700 |
| B | 1050 |
| C | 800 |

Connections

| | |
|---|------------------------------------|
| 1 | Secondary Outlet Connection - DN50 |
| 2 | Secondary Inlet Connection - DN50 |
| 3 | Primary Inlet Connection - DN50 |
| 4 | Primary Outlet Connection - DN50 |

Schematic Drawing Key

| | |
|---|---|
| a | Motorised 3 Port Control Valve |
| b | Primary Circulation Pump(s) |
| c | PID Control Unit - MODBUS / BMS Interface |
| d | Control Temperature Sensor - PT100 |
| e | Gasketed Plate Heat Exchanger |
| f | Secondary Circulation Pump |

