

## ProPak Thermal 25-Series SS Semi Instantaneous Packaged Plate Heat Exchanger

### Product Description

WRAS and KIWA UK Reg 4 Approved Packaged Plate Heat Exchanger suitable for Domestic HotWater Generation.

The ProPak Thermal range of packaged plate heat exchangers are suitable for the generation of domestic hot water in commercial and industrial applications. Each WRAS and KIWA UK Reg 4 approved unit is constructed with Stainless Steel AISI 316 plate heat exchangers, has a MODBUS interface and fully modulating ERP A rated primary pumps.

### ProPak ® Thermal Range: Features

- Full WRAS Approval (WRAS Approval Number 2312347)
- Heat outputs: 75 – 800kw
- Stainless Steel AISI 316 Plates
- EPDM Gaskets
- ERP A rated fully modulating Primary Pumps
- PID Controller with MODBUS Interface
- Fast acting Siemens 3-port valve
- High Density, Semi-Rigid Insulation

### ProPak ® Thermal Range: Options

- Skid Mounting with pre-connected Buffer Vessel
- High Outputs: 1mw + options




### Technical Specification

Plate Construction Material	AISI 316L Stainless Steel
Gasket Construction Material	EPDM - PRX Gasket
Press Plate and Mounting Frame Construction Material	Epoxy Coated Quality Mild Steel
Ancillaries Mounting Pipework	AISI 316L Stainless Steel
Insulating Jacket Material	30mm High Density Semi - Rigid Polyolefin Foam (PO)
Full PID Control Unit	MODBUS RTU/RS 485 BMS Interface
Maximum Full Load Current	5 Amp
Primary Circuit Motorised 3 Port Control Valve	Siemens VXG 48.32 / SAS 61.03 Actuator
Primary Circulation Pump	Wilo Yonos Para 25 - 130
Secondary Circuit Shunt Pump	Grundfos UPS 32 - 80N
Total Length	700 mm
Total Width	302 mm
Weight	65 kg
Maximum Operating Pressure - Primary	10 bar
Maximum Operating Pressure - Secondary	10 bar
WRAS Approval Number	2312347

# TECHNICAL PRODUCT SUBMITTAL

## ProPak Thermal 25-Series SS Semi Instantaneous Packaged Plate Heat Exchanger

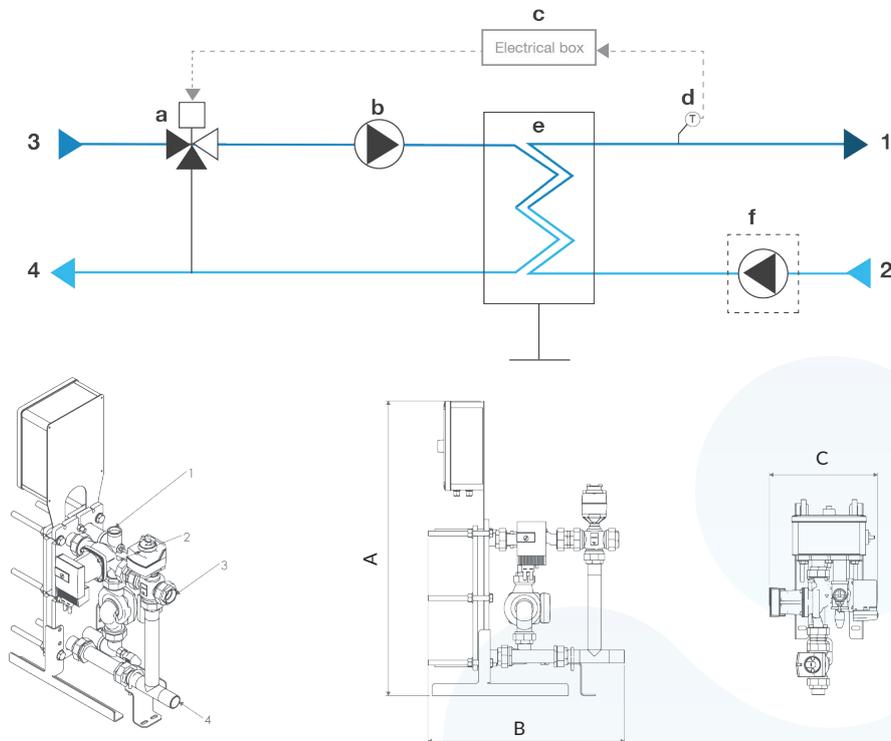

### Dimensions (mm)

A	1152
B	700
C	302

### Connections

1	Secondary Outlet Connection - DN32
2	Secondary Inlet Connection - DN32
3	Primary Inlet Connection - DN32
4	Primary Outlet Connection - DN32

### Schematic Drawing Key

a	Motorised 3 Port Control Valve
b	Primary Circulation Pump
c	PID Control Unit - MODBUS / BMS Interface
d	Control Temperature Sensor - PT100
e	Gasketed Plate Heat Exchanger
f	Secondary Circulation Pump

