

ProPak Thermal 4-Series SS Semi Instantaneous Packaged Plate Heat Exchanger

Product Description

WRAS and KIWA UK Reg 4 Approved Packaged Plate Heat Exchanger suitable for Domestic Hot Water Generation.

The ProPak Thermal range of packaged plate heat exchangers are suitable for the generation of domestic hot water in commercial and industrial applications. Each WRAS and KIWA UK Reg 4 approved unit is constructed with Stainless Steel AISI 316 plate heat exchangers, has a MODBUS interface and fully modulating ERP A rated primary pumps.

ProPak ® Thermal Range: Features

- Full WRAS Approval (WRAS Approval Number 2312347)
- Heat outputs: 75 – 800kw
- Stainless Steel AISI 316 Plates
- EPDM Gaskets
- ERP A rated fully modulating Primary Pumps
- PID Controller with MODBUS Interface
- Fast acting Siemens 3-port valve
- High Density, Semi-Rigid Insulation

ProPak ® Thermal Range: Options

- Skid Mounting with pre-connected Buffer Vessel
- High Outputs: 1mw + options




Technical Specification

Plate Construction Material	AISI 316L Stainless Steel
Gasket Construction Material	EPDM - PRX Gasket
Press Plate and Mounting Frame Construction Material	Epoxy Coated Quality Mild Steel
Ancillaries Mounting Pipework	AISI 316L Stainless Steel
Insulating Jacket Material	30mm High Density Semi - Rigid Polyolefin Foam (PO)
Full PID Control Unit	MODBUS RTU/RS 485 BMS Interface
Maximum Full Load Current	8 Amp
Primary Circuit Motorised 3 Port Control Valve	Siemens VXG 48.40 / SAS 61.03 Actuator
Primary Circulation Pump(s)	Yonos Maxo - D 40 / 0.5 - 12
Secondary Circuit Shunt Pump	Grundfos TP40 - 60
Total Height	1310 mm
Total Length	924 mm
Total Width	775 mm
Weight	200 kg
Maximum Operating Pressure - Primary	10 bar
Maximum Operating Pressure - Secondary	10 bar
WRAS Approval Number	2312347

TECHNICAL PRODUCT SUBMITTAL

ProPak Thermal 4-Series SS Semi Instantaneous Packaged Plate Heat Exchanger

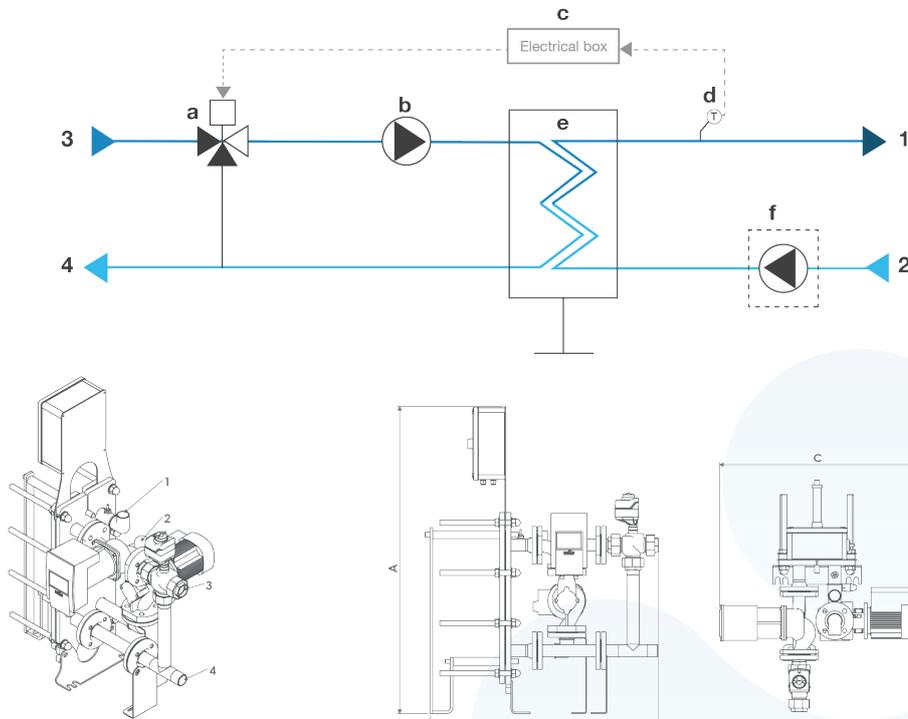

Dimensions (mm)

A	1310
B	924
C	775

Connections

1	Secondary Outlet Connection - DN40
2	Secondary Inlet Connection - DN40
3	Primary Inlet Connection - DN40
4	Primary Outlet Connection - DN40

Schematic Drawing Key

a	Motorised 3 Port Control Valve
b	Primary Circulation Pump(s)
c	PID Control Unit - MODBUS / BMS Interface
d	Control Temperature Sensor - PT100
e	Gasketed Plate Heat Exchanger
f	Secondary Circulation Pump

