

**ProRapid 200**


**Semi Instantaneous DHW Generator**

**Product Description**

The ProRapid range of Semi Instantaneous DHW Generators are suitable for a wide range of water heating applications. Each ProRapid unit combines a AISI 316 stainless steel DHW buffer vessel with externally mounted WRAS approved brazed plate heat exchanger, charging pump and control panel. The ProRapid is suitable for use with a variety of primary heat sources including Gas Boilers, District Heating Schemes and Heat Pumps.

**ProRapid Range: Features**

- BMS Compatible
- Integral Legionella Control
- Visual DHW Temperature Display
- High Temperature Thermostat
- Option for Single or Three Phase Electrical Immersion Elements



**ASHP  
READY**




**Technical Specification**

Capacity	196 litres
Orientation	Vertical
Construction Material: Shell	AISI 316L Stainless Steel
Construction Material: Plate Heat Exchanger	Stainless Steel WRAS No: 2011003
Charging Pump	WILO STAR Z 20/7: WRAS No: 2106803
Insulation Material & Thickness	100mm Flexible Polyurethane with metal sheet outer
Standing Energy Losses*	40 w/hr
	0.96 kwh/24hrs
Total Height with Insulation	1310mm
Total Diameter	700mm
Total Diameter + PHX Assembly	1000mm
Weight Empty	64 kg
Maximum working pressure - Vessel	6 bar
Test Pressure	9 bar
Maximum working temperature	99°C

\* Based upon ERP standard 65°C cylinder temperature at 20°C ambient air temperature

## ProRapid 200 Semi Instantaneous DHW Generator

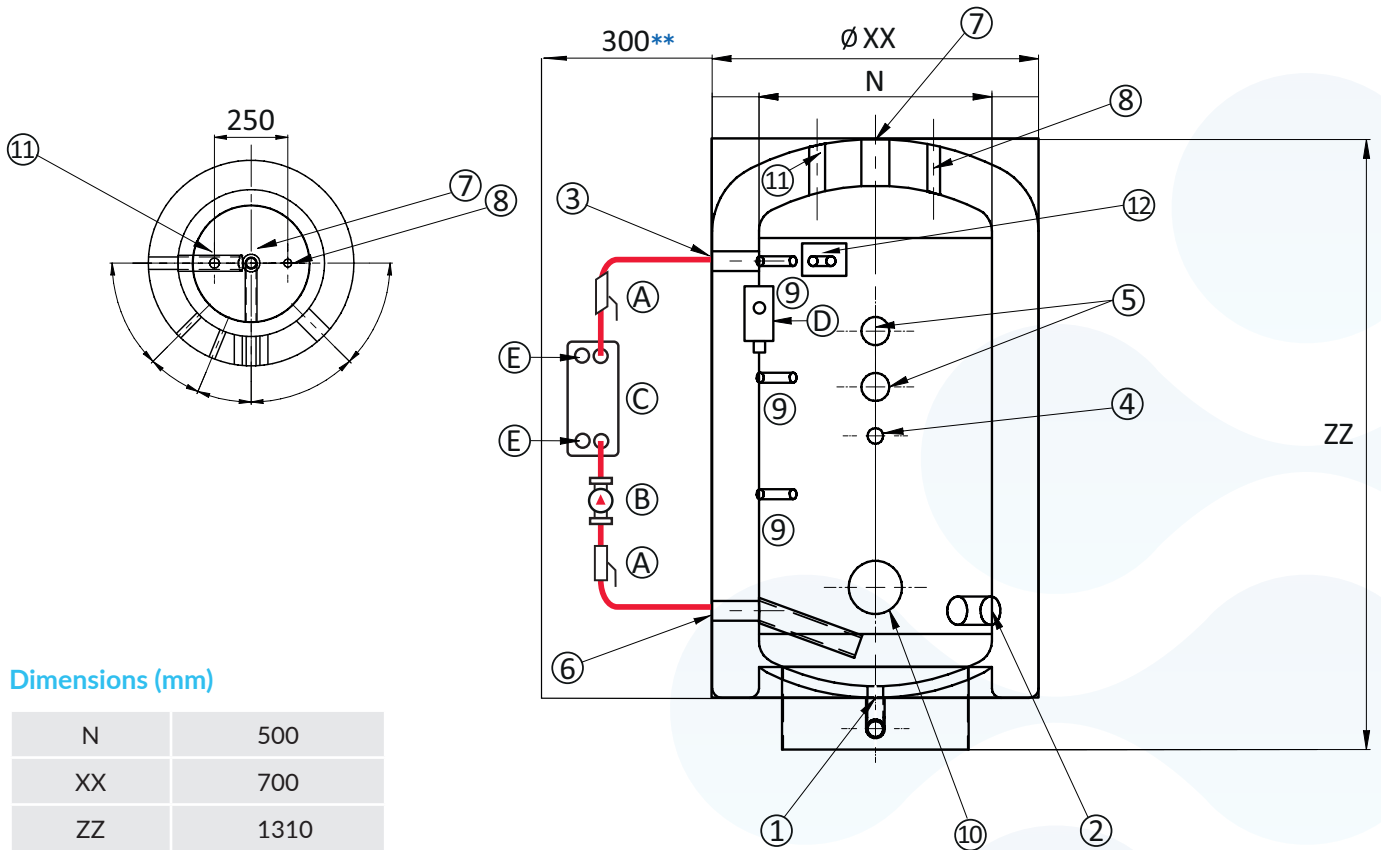

### Dimensions (mm)

N	500
XX	700
ZZ	1310

### Connections

1	Drain	1"	A	Isolation Valve
2	Service Connection	2"	B	Charging Pump
3	Destratification Outlet	1 ¼"	C	Brazen Plate Heat Exchanger
4	Secondary Return Inlet	1"	D	Control Panel
5	Service Connection Optional Immersion	2"	E	Primary Connections: PHE 1"/1 ¼" *
6	Destratification Inlet	1 ¼"	* Primary connection size depends upon kw heat input and temperature profile. ** Approximate dimension depending upon PHE design.	
7	Domestic Hot Water Outlet	2"		
8	Temp & Pressure Relief Valve	¾"		
9	Sensor Tappings x3	½"		
10	Access Hatch / Electrical Immersion	4"		
11	Anti Vac Valve	1"		
12	High Limit Stat	½"		

