

**ProStor PS 2000 Thermal Heating Water Storage Vessel**


**Product Description**

**ProStor PS Thermal: Heating / Chilled Water Storage Vessel**

The ProStor PS range is suitable for Heating and Chilled water applications and can be used for installations with Air Source Heat Pumps. Each vessel is supplied fully insulated and with a variety of heat carriers, service connections and sensor pockets to give flexibility to the design engineer and installer. ProStor PS vessels are fitted with baffle plates to help promote stratification, inspection hatch, and inlet/ outlet deflector plates. Vessels can be shipped with or without insulation as requested.

**PS Range: Features**

- High Quality Steel Construction
- Capacities 50 - 10,000 litres
- Stratification Baffles
- Low Standing Losses
- 3 Year Warranty
- ASHP Ready Logo
- Suitable for use with heating water applications



**ASHP  
READY**




**Technical Specification**

Capacity	2000 litres
Orientation	Vertical
Construction Materials	High Quality Steel
Insulation Material & Thickness	20mm Close Cell Insulation + 100mm Flexible Insulation with PVC Outer Jacket
Standing Energy Losses*	190.7 w/hr
	4.58 kwh/24hrs
Total Height with Insulation	2575mm
Total Diameter with Insulation	1340mm
Total Diameter without Insulation	1100mm
Weight Empty	315 kg
Maximum working pressure - Vessel	6 bar
Test Pressure	9 bar
Maximum working temperature	95°C

\* Based upon ERP standard 65°C cylinder temperature at 20°C ambient air temperature

# TECHNICAL PRODUCT SUBMITTAL

## ProStor PS 2000 Thermal Heating Water Storage Vessel

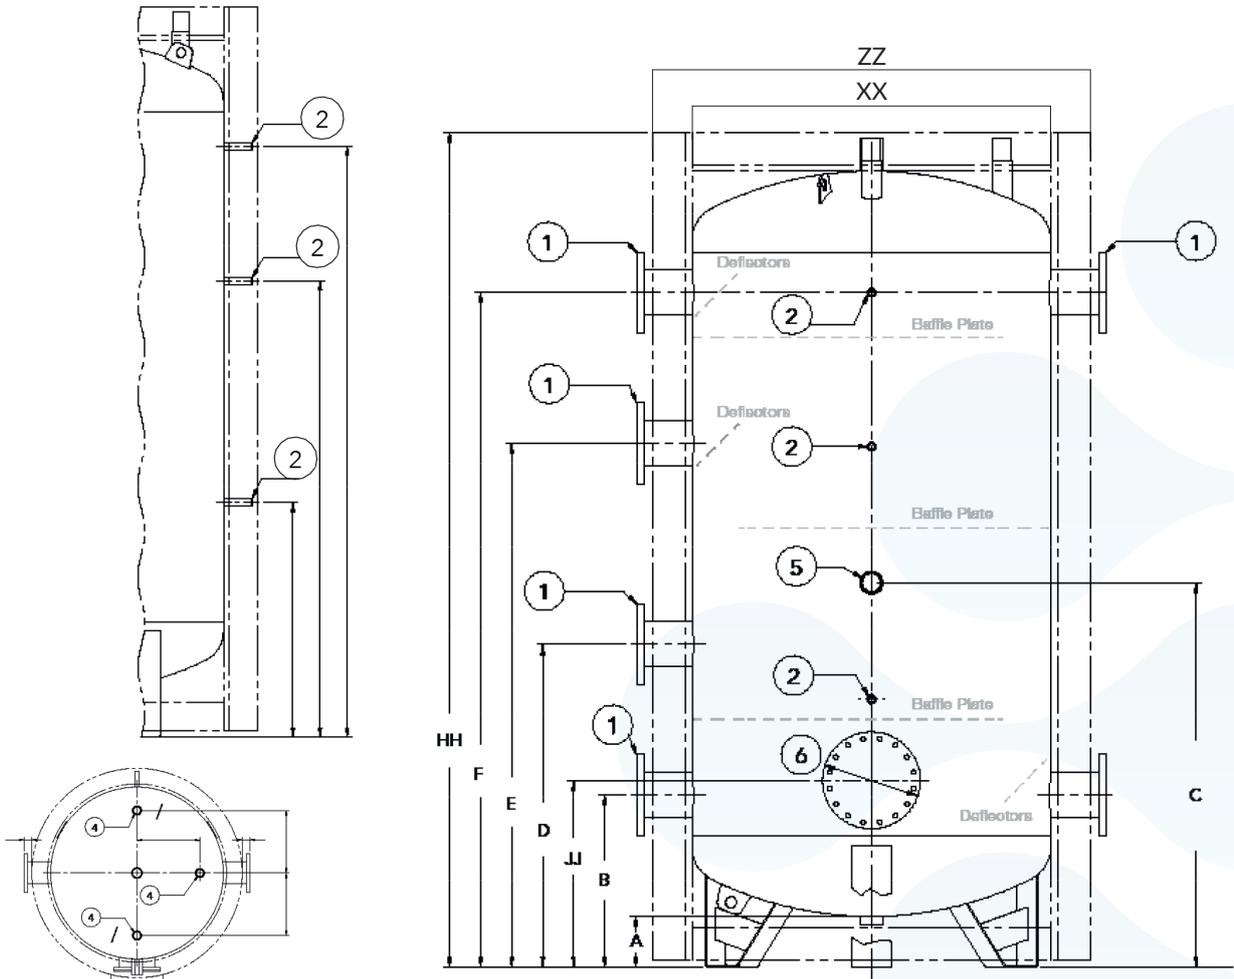

### Dimensions (mm)

A	155 mm
B	530 mm
C	1185 mm
D	995 mm
E	1615 mm
F	2080 mm
HH	2575 mm
JJ	575 mm
XX	1100 mm
ZZ	1340 mm

### Connections (BSP/mm)

1	Service Connection x6	DN125
2	Sensor Tappings x6	½"
3	Drain x1	2"
4	Top Connections x3	1½"
5	Immersion Connections x1	2"
6	Inspection Hatch (mm)	300/220

