

ProStor PS 1500 Thermal Heating Water Storage Vessel


Product Description

ProStor PS Thermal: Heating / Chilled Water Storage Vessel

The ProStor PS range is suitable for Heating and Chilled water applications and can be used for installations with Air Source Heat Pumps. Each vessel is supplied fully insulated and with a variety of heat carriers, service connections and sensor pockets to give flexibility to the design engineer and installer. ProStor PS vessels are fitted with baffle plates to help promote stratification, inspection hatch, and inlet/ outlet deflector plates. Vessels can be shipped with or without insulation as requested.

PS Range: Features

- High Quality Steel Construction
- Capacities 50 - 10,000 litres
- Stratification Baffles
- Low Standing Losses
- 3 Year Warranty
- ASHP Ready Logo
- Suitable for use with heating water applications



**ASHP
READY**




Technical Specification

Capacity	1383 litres
Orientation	Vertical
Construction Materials	High Quality Steel
Insulation Material & Thickness	20mm Close Cell Insulation + 100mm Flexible Insulation with PVC Outer Jacket
Standing Energy Losses*	144.7 w/hr
	3.47 kwh/24hrs
Total Height with Insulation	2185mm
Total Diameter with Insulation	1240mm
Total Diameter without Insulation	1000mm
Weight Empty	231 kg
Maximum working pressure - Vessel	6 bar
Test Pressure	9 bar
Maximum working temperature	95°C

* Based upon ERP standard 65°C cylinder temperature at 20°C ambient air temperature

TECHNICAL PRODUCT SUBMITTAL

ProStor PS 1500 Thermal Heating Water Storage Vessel

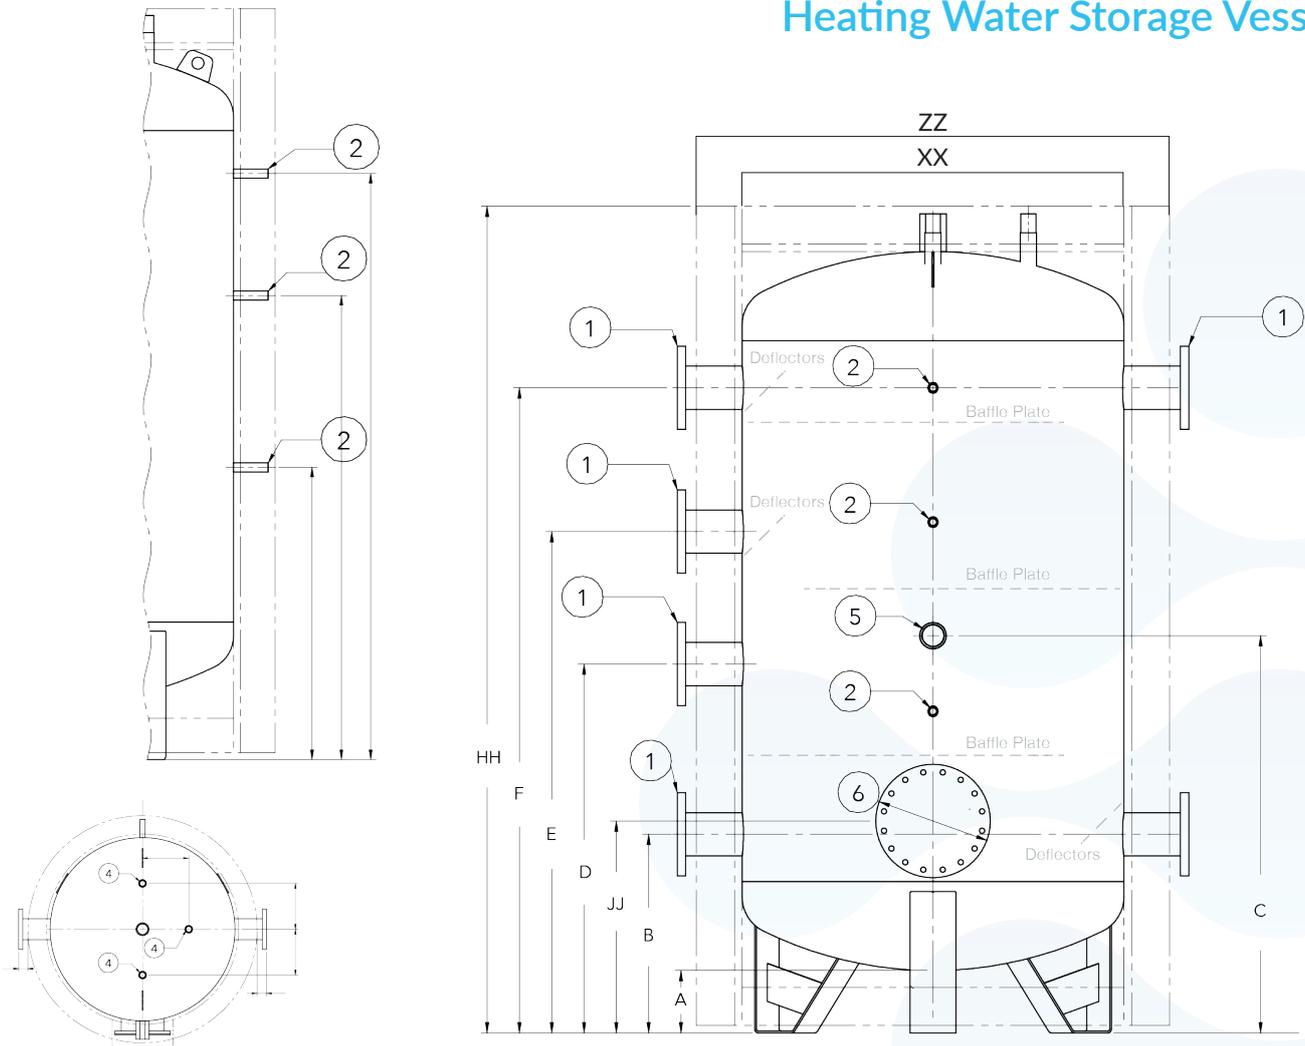

Dimensions (mm)

A	165 mm
B	525 mm
C	1050 mm
D	975 mm
E	1325 mm
F	1705 mm
HH	2185 mm
JJ	560 mm
XX	1000 mm
ZZ	1240 mm

Connections (BSP/mm)

1	Service Connection x6	DN100
2	Sensor Tappings x6	½"
3	Drain x1	2"
4	Top Connections x3	1"
5	Immersion Connections x1	2"
6	Inspection Hatch (mm)	300/220

